



Installing Hard-Drive with camDisk (NAS)

User's Manual

Install or remove the hard-drive from the camDisk (NAS): 1.0

Manual revision: 1.0

Date: April 17, 2004

3JTech Co., Ltd.
342 Fu-Hsing N. Rd., 2F
Taipei, Taiwan
Tel: +886-2-2500 6919
e-mail: info@3jtech.com.tw

Install the hard-drive from the camDisk (NAS)

Revision History

Revision	Date	Changes
1.0	April 8, 2004	Installing/ removing the hard-drive from the camDisk (NAS) / Angus Wang

Table of Content:

Revision History	2
Table of Content:	2
1. Removing the CamDisk case	3
1.1 Loosening the Screws	3
1.2 Removing the Back Lid	3
1.3 Removing the Top Casing	4
2. Installing the hard-drive.....	5
2.1 Tighten the hard-drive	5
2.2 Plugging the power cable and bus into the hard-drive	6
2.3 Installing the hard-drive with camDisk (NAS)	7
2.4 To restore the CamDisk (NAS)	8

Install the hard-drive from the camDisk (NAS)

1. Removing the CamDisk case

1.1 Loosening the Screws

The information provided in this section will assist you in assembling and installing the camDisk (NAS) correctly. Firstly, you will need to hold the camDisk vertically and unscrew all four screws located in each corner.



Figure 1.1.1



Figure 1.1.2

1.2 Removing the Back Lid

After loosening all four screws, you will be ready to remove the lid off from the camDisk (NAS). Gently take off the lid to reveal the back part of camDisk (NAS), shown below as Figure 1.2.2.



Figure 1.2.1



Figure 1.2.2

Install the hard-drive from the camDisk (NAS)

1.3 Removing the Top Casing

To remove the top casing, gently slide the lid and push it open. Before the lid can come apart entirely, two more screws needs to be loosened (Figure 1.3.2). After loosening the screws, case can be taken apart completely as shown in Figure 1.3.3.



Figure 1.3.1



Figure 1.3.2



Figure1.3.3

Install the hard-drive from the camDisk (NAS)

2. Installing the hard-drive

2.1 Tighten the hard-drive

Before installing the cable and the bus for the hard-drive (Figure 2.2.1), flip the hard-drive over and tighten all four screws on the hard-drive shown in Figure 2.2.2.



Figure 2.2.1

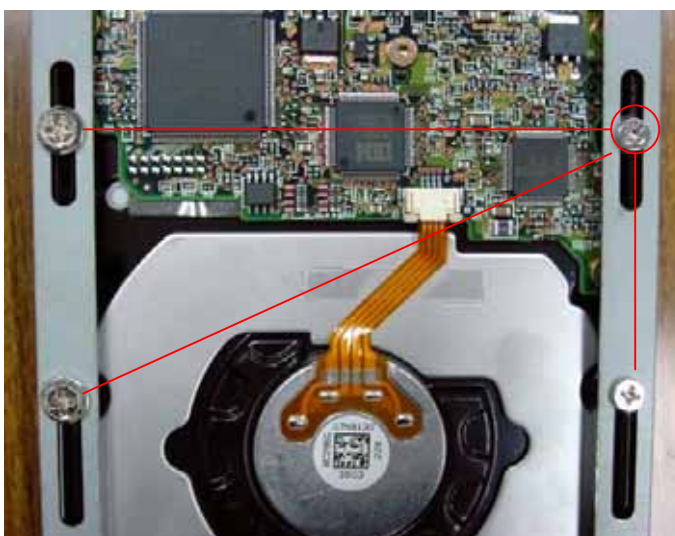


Figure 2.2.2

Install the hard-drive from the camDisk (NAS)

2.2 Plugging the power cable and bus into the hard-drive

Before plugging the hard-drive into the case, you will need to connect power cable and bus with hard-drive as Figure 2.2.1. Please see Figure 2.2.2 for the connection status.



Figure 2.2.1



Figure 2.2.2

Install the hard-drive from the camDisk (NAS)

2.3 Installing the hard-drive with camDisk (NAS)

Prior to installing the hard-drive with camDisk (NAS), you will need to tighten four screws shown in Figure 2.3.1. The Power cable and bus need to be connected before attaching hard-drive with camDisk (NAS).



Figure 2.3.1



Figure 2.3.2

Install the hard-drive from the camDisk (NAS)

2.4 To restore the CamDisk (NAS)

To restore the top casing, gently slide the lid and push inward in order to close the case (Figure 2.4.1). Make sure CamDisk is completely pushed in and sealed tight. (Figure 2.4.2)



Figure 2.4.1



Figure 2.4.2